

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent application of :
Paul RICH et al. : Attorney Docket No. WLJ.103
Serial No. NEW : Mail Stop New Application
Filed March 10, 2004 :

METHODS OF FORMING TUNGSTEN OR TUNGSTEN CONTAINING FILMS

CLAIM OF PRIORITY

U.S. Patent and Trademark Office
2011 South Clark Place
Customer Window, Mail Stop Patent Application
Crystal Plaza Two, Lobby, Room 1B03
Arlington, VA 22202

Sir:

Applicants, in the above-identified application, hereby claim the priority date
under the International Convention of the following British application:

Appln. No. 0305544.9 filed March 11, 2003

as acknowledged in the Declaration of the subject application.

A certified copy of said application is being submitted herewith.

Respectfully submitted,

VOLENTINE FRANCOS, PLLC



Adam C. Volentine
Registration No. 33,289

12200 Sunrise Valley Drive, Suite 150
Reston, Virginia 20191
Tel. (703) 715-0870
Fax. (703) 715-0877

Date: March 10, 2004

THIS PAGE BLANK (USPTO)



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport.
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.



Signed



Dated 20 February 2004


THIS PAGE BLANK (USPTO)

Patents Form 1/77

Patents Act 1977
Form 1/7711MAR03 E771345-1 002838
P01/7700 0.00-0305544.9

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

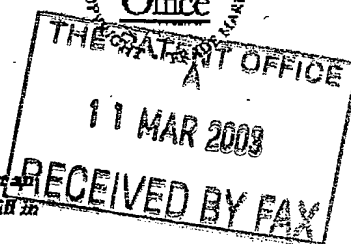

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

BD/JS/DBN.169

2. Patent application number

(The Patent Office will fill in this part)

0305544.9

11 MAR 2003

3. Full name, address and postcode of the or of each applicant (*underline all surnames*)

Trikon Technologies Limited
Coed Rhedyn
Ringland Way
Newport. Gwent. NP18 2TA

Patents ADP number (*if you know it*)

If the applicant is a corporate body, give the country/state of its incorporation.

United Kingdom

7385636001

4. Title of the invention

Methods of forming Tungsten or
Tungsten containing films

5. Name of your agent (*if you have one*)

Wynne-Jones, Laine & James

"Address for service" in the United Kingdom
to which all correspondence should be sent
(*including the postcode*)

22 Rodney Road
Cheltenham
Glos.
GL50 1JJ

Patents ADP number (*if you know it*)

1792001 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (*if you know it*) the or each application number

Country

Priority application number
(*if you know it*)Date of filing
(*day / month / year*)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(*day / month / year*)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (*Answer 'Yes' if:*

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

See note (1))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form -

Description 6 ✓

Claim(s) 2 ✓

Abstract -

Drawing(s) 9 only ✓

10. If you are also filing any of the following, state how many against each item.

Priority documents -

Translations of priority documents -

Statement of inventorship and right to grant of a patent (Patents Form 7/77) -

Request for preliminary examination and search (Patents Form 9/77) -

Request for substantive examination (Patents Form 10/77) -

Any other documents -
(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

WYNNE-JONES, LAINE & JAMES

Date 11.03.2003

12. Name and daytime telephone number of person to contact in the United Kingdom

Mr. B.K.C. Dunlop - (01242) 515807

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

0063121 11-Mar-03 05:00

Methods of Forming Tungsten or Tungsten Containing Films

The present invention relates to methods of forming tungsten or tungsten-containing film and in particular such methods for use in for producing gate stack layers upon wafers as part of the formation of semiconductor devices.

5 For processing semiconductor devices in the sub-100nm regime new gate structures with low resistivity to reduce the RC delay are being considered. A particular example under consideration is a polysilicon/tungsten nitride/tungsten gate electrode structure. This structure is attractive because of the much lower
10 resistivity of the W/WN to the prior art WSi or poly-Si, and its ability to withstand subsequent high temperature (e.g. 1000C) capacitor anneals required by some memory device technologies. Physical vapour deposition is preferred over chemical vapour deposition because CVD processing results in fluorine contamination.

15 This proposed structure requires the resistivity of the WN/W layers to be as low as possible and the state of the art know to the inventors is for the sputtered W resistivity to be 11-12 micro ohm cm at a wafer platen temperature of 250C.

20 As the bulk resistivity of W is 5.5 micro ohm cm, this suggests that there is scope for improvement and the inventors therefore sought to reduce the resistivity of the sputtered W film further.

Argon is almost universally used for the sputtering of metallic layers onto silicon wafers though an improvement in the sputtered layer thickness at the base of high aspect ratio recesses has been reported e.g. in WO 02/053796 of the
25 applicants and EP 1096036. This is achieved by e.g. the reduction of sputter pressure (reduced scattering of sputtered material) possible with some alternative noble gasses to argon and/or where the advantage offered by alternative sputter gasses is the more normal angle of ejection of sputtered material from the surface of the target.

30 From one aspect the invention consists in a method of sputtering a tungsten or tungsten containing film from a tungsten target onto a semiconductor wafer including using krypton or xenon as a sputter gas.

As will be gathered from the preamble, the applicants principle interest in this method in this case is producing a field style deposition, rather than the high aspect ratio depositions mentioned above. The adoption of higher atomic weight gasses for these latter depositions is not obvious, because the motivation of achieving an angle of ejection close to 90° is not present in these circumstances and indeed may not be particularly desirable from a uniformity point of view if the surface receiving the deposition is anything other than completely flat.

Preferably the deposition takes place in a vacuum chamber with the krypton pressure of less than 10mT and it is particularly preferred that the krypton pressure is less than 6mT.

It is preferred that the resultant resistivity of the tungsten film is less than $11\mu\text{ohm cm}$. The power supplied to a target of 330mm diameter maybe above 3kW being a power density of about 1 watt cm^{-1} .

The wafer may be placed on a platen during deposition and the platen temperature may be between 200°C and 400°C and/or the platen may be negatively DC biased, for example by applying 13.56MHz RF power to the platen. The broad method set out initially above may be adapted so that the sputtering is reactive sputtering; the sputter gasses include nitrogen and the film deposited in tungsten nitride.

In this case the sputter gasses may further include argon and the ratio of argon to krypton or xenon may be selected to minimize stress in the deposited film.

From another embodiment the invention consists in a method of forming a tungsten/tungsten nitride stack on a wafer including sputtering a tungsten nitride film on a wafer and sputtering a tungsten film on the tungsten nitride film, wherein the two sputtering processes are performed in a single chamber using a single target.

Preferably the wafer is on a platen and the platen temperature is maintained substantially the same for the two sputter processes.

Conveniently the tungsten film may be sputtered using a method as defined above and/or the tungsten nitride film may be deposited using a method as defined above or the sputter gas in that last case may be entirely argon.

The invention includes forming a gate structure using the stack forming methods defined above.

5 From another aspect the invention therefore consists in a method of using krypton in the sputtering of tungsten nitride and tungsten onto a substrate surface without recesses wherein the sputtering of the WN and W is performed in the same chamber using a single tungsten target. One application of such a method is the sputtering of a gate stack onto a polysilicon surface on a silicon wafer e.g. for the formation of a memory device, and the invention includes such a stack.

10 Although the invention has been defined above it is to be understood that it includes any inventive combination of the features set out above or in the following description.

The invention may be performed in various ways and its specific embodiment will be described with reference to the accompanying drawings in which:

15 Figure 1 shows the resistivity of a sputtered tungsten film against argon pressure for particular deposition conditions;

Figure 2 shows the resistivity of a sputtered tungsten film with respect to platen temperature, with the conditions otherwise as in Figure 1;

20 Figure 3 is a table giving film characteristics for a tungsten nitride film deposited respectively at 200°C and 400° using a mixture of argon and nitrogen;

Figure 4 is a plot of resistivity against pressure for films deposited by argon and krypton respectively;

25 Figure 5 is a graph illustrating the variation in resistivity with platen bias during krypton induced deposition;

Figure 6 is a corresponding graph for resistivity against power, with no bias voltage; and

Figure 7 compares film characteristics for a tungsten nitride film deposited using argon and krypton respectively.

30 The sputtering system used for this process was a Trikon Technologies Inc. Sigma® fxP® single wafer multi-chamber cluster sputter tool where wafers

are placed singly onto a heated platen face up opposing a fixed target with a moving magnetron behind.

5 The wafers are transported from atmosphere to vacuum and are then transported under vacuum into a pre-clean chamber where they are degassed. Typically they may be sputter cleaned. They are then transported under vacuum to a deposition chamber where they are placed upon the platen. It should be understood that there is a strong commercial advantage in being able to deposit both the WN and W layers in the same process chamber. This therefore requires that the platen temperature and target are the same for both processes as it is impracticable to change temperature or target without making the chamber significantly more complex, thus losing the advantage of simplicity, space and cost from carrying out the two processes in the same chamber. The WN is thereby formed by reactive sputtering, where nitrogen is added to the noble sputter gas to form the nitride from the metal target. A process platen temperature is selected as a compromise for the two processes and as appropriate for the processes.

15 150mm silicon wafers were used for the experiments and a 99.999% pure W target supplied by Honeywell was used for the sputtering. Sheet resistivity was measure by an automatic 4 point probe and thickness measured by electron microscope observation of cleaved wafers. All wafers were outgassed in a separate module for 2 minutes with 2kw applied to a heater lamp.

20 Figure 1 shows resistivity of sputtered tungsten with respect to argon pressure at 1kw of applied power and a 200°C platen temperature (no wafer clamping). The argon gas was supplied at 200sccm. As can be seen there is a significant effect of pressure on resistivity, with a minima achieved at around 6 millitorr. This observation of a minima in resistivity with both higher and lower pressures yielding higher resistivity is well known with the literature offering various competing explanations as to why.

25 Figure 2 shows resistivity of sputtered tungsten with respect to platen temperature with process conditions as for figure 1 at an argon pressure of 6 millitorr. As is usual for metals resistivity drops with increasing deposition temperature. The temperatures given in the figure are of the platen with the

wafer unclamped. In a steady state without sputtering a platen temperature of 400°C gives a silicon wafer temperature of approximately 280°C where there is no significant gas conduction e.g. at a pressure of less than say 50 millitorr. No substrate bias voltage was applied.

5 Thin films of tungsten nitride deposited at platen temperature of 200°C and 400°C have broadly the same characteristics. Results are given in figure 3 for a process of 38 seconds of preheat, 1kw of applied power and 60sccm of argon and 70sccm of nitrogen.

10 It has been found that substituting krypton for argon significantly reduces the resistivity of the sputtered tungsten, whilst using the same target and target power supply, pumping system, platen temperature and target to substrate distance.

15 In figure 4 can be seen resistivity of tungsten for both argon and krypton with respect to pressure. The sputtering was at 1 kw of applied power to the target with no substrate bias voltage. For the same applied power, the sputter rate was higher, the target voltage was higher and the target current was lower as is shown in Figure 8. Krypton deposited tungsten at 84nm per Kw/minute compared to 65 nm per Kw/minute for argon. As can be seen from Figure 4, down to about 10 millitorr krypton and argon deposit tungsten of the same
20 resistivity. Below about 10 millitorr there are pressures at which krypton deposits lower resistivity tungsten than argon. Further experiments are expected to reveal that there is a minimal to the resistivity of tungsten sputtered by krypton, with lower pressures producing higher resistivity films. Above 10 millitorr it is interesting to note that it is argon that deposits lower resistivity tungsten than
25 krypton as can be seen at the data points at 14 millitorr where tungsten resistivity is 12.27 micro ohm cm for argon and 15.6 micro ohm cm for krypton. Applying substrate bias voltage by applying 13.56MHz RF power to the platen reduces resistivity for both argon and krypton. The results shown in figure 5 are for krypton at 7 millitorr pressure.

30 Increased target power reduces sputtered tungsten resistivity for krypton, whilst it increases resistivity with argon. Figure 6 shows the effect of target power on resistivity for krypton at 2 millitorr with no bias voltage applied to the

6

substrate. As can be seen a resistivity of about 8.5 micro ohm cm is achieved, without bias. Further experiments are planned with bias and higher target power levels and also reduced sputtering pressures.

5 It should be understood that as these are very thin layers it is not always practicable to increase target power density as deposition films may become impracticably short to control precisely.

10 Krypton was then substituted for argon in the tungsten nitride process with 1kw of power applied to the target and 60sccm of argon or krypton and 70sccm of nitrogen and the results are shown in figure 7. As can be seen there is a strong effect on film stress, indicating a different film structure which may influence barrier performance and stability.

15 It is therefore clearly possible to mix argon and krypton with the nitrogen to form tungsten nitride barriers with specific stress characteristics, e.g. nominally zero. Different mixtures of argon and krypton ranging from 0% to 100% may be used for the two processes in the same chamber. Figure 9 shows the effect of changing the sputter gas on the stress of a tungsten film. The gas flows of Argon and krypton selected are those that yield lowest resistivity. As can be seen the film stress may be changed from compressive to tensile by changing from argon to krypton, again indicating a possibility of depositing a zero stress film. Further improvements in resistivity of tungsten may be achieved by using xenon or xenon mixtures, xenon having a significantly higher molar mass than krypton and argon.

20

25

30

Claims

1. A method of sputtering a tungsten or tungsten-containing film from a tungsten target onto a semiconductor wafer including using krypton or xenon as a sputter gas.
- 5 2. A method as claimed in claim 1 wherein the deposition takes place in a vacuum chamber with a krypton pressure of less than 10mT.
3. A method as claimed in claim 2 wherein krypton pressure is less than 6mT.
- 10 4. A method as claimed in any one of claim 1 to 3 wherein the resistivity of the tungsten film is less than 11 μ ohm cm.
5. A method as claimed in any one of the preceding claims wherein the power supplied to the target is greater than about 1 watt per cm.
6. A method as claimed in any one of the preceding claims wherein the wafer is placed on a platen during deposition and the platen temperature is
15 between 200°C and 400°C.
7. A method as claimed in any one of the preceding claims wherein the platen is negatively DC biased.
8. A method as claimed in claim 1 wherein the sputtering is reactive sputtering; the sputter gases includes nitrogen and the film deposited is tungsten
20 nitride.
9. A method as claimed in claims 1 to 8 wherein the sputter gasses further include argon.
10. A method as claimed in claim 9 wherein the ratio of argon to krypton or xenon is selected to minimise stress in the deposited film.
- 25 11. A method of forming a tungsten/tungsten nitride stack on a wafer including sputtering a tungsten nitride film on a wafer and sputtering a tungsten film on the tungsten/nitride film wherein the two sputtering processes are performed in a single chamber using a single target.
12. A method as claimed in claim 11 wherein the wafer is on a platen and the
30 platen temperature is maintained substantially the same for the two sputter processes.

8

13. A method as claimed in claim 10 or claim 11 wherein the tungsten film is sputtered using a method as claimed in any one of the claims 1 to 7.

14. A method as claimed in any one of claim 11 to 13 wherein the tungsten or tungsten containing film is deposited using the method of claims 8 to 10.

5 15. A gate structure formed by the methods of any one of claims 11 to 14.

10

15


20

25

30

9


Figure 1

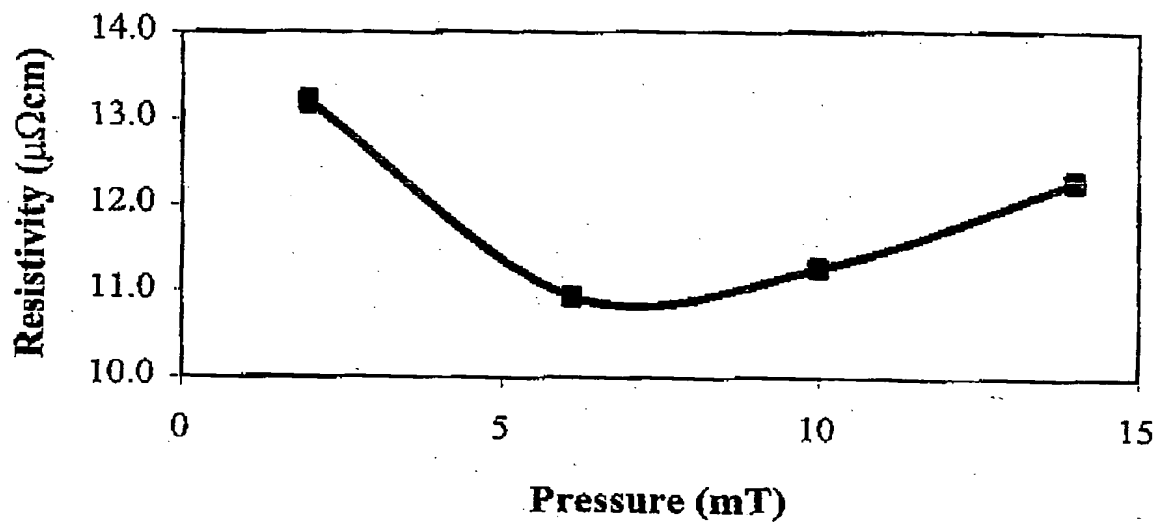

5

THIS PAGE BLANK (USPTO)

Figure 2

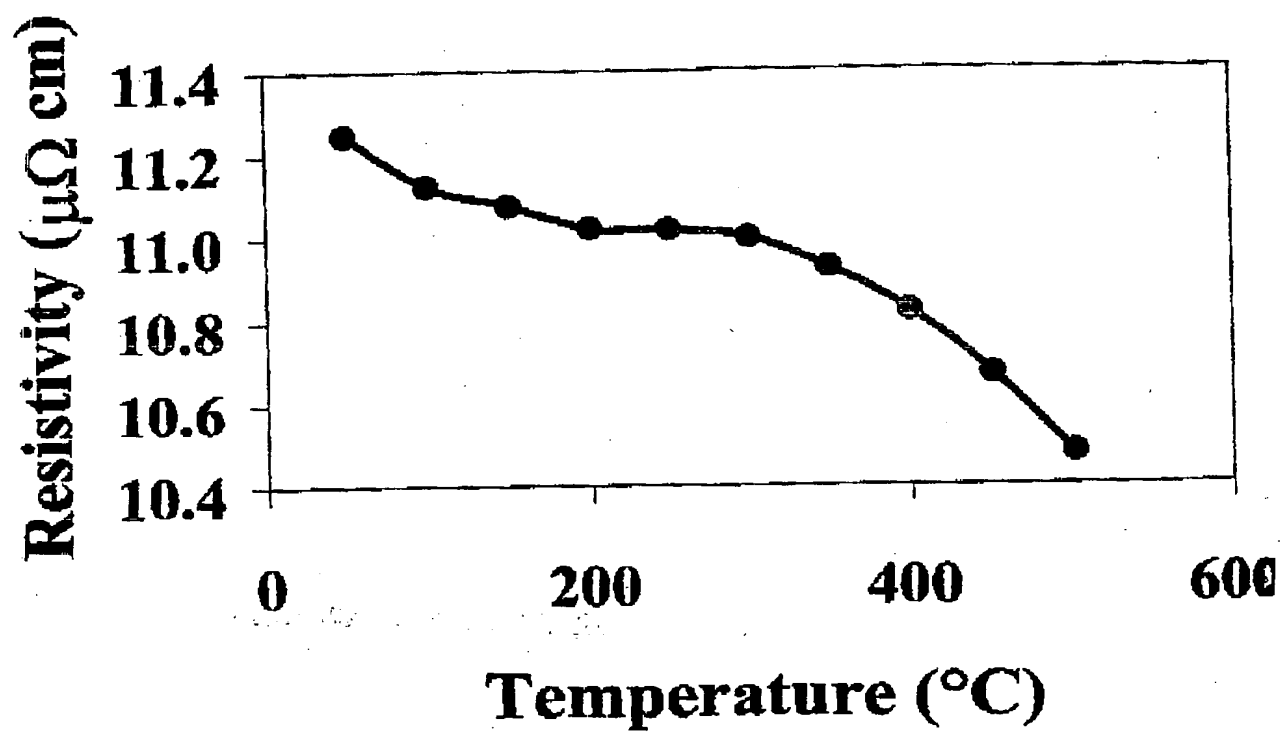


THIS PAGE BLANK (USPTO)

figure 3

	200°C platen	400°C platen
Deposition rate	28 nm/kW min	29 nm/kW min
Resistivity (micro ohm cm ⁻¹)	181	181
Film Stress (dynes cm ⁻²)	1.2 E10	2.5 E10

THIS PAGE BLANK (USPTO)

figure 4

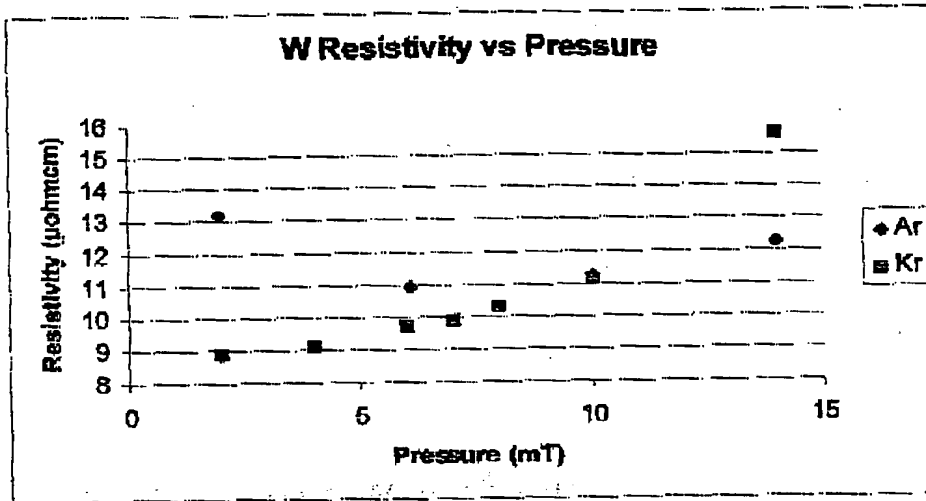


THIS PAGE BLANK (USPTO)

13

figure 5

5

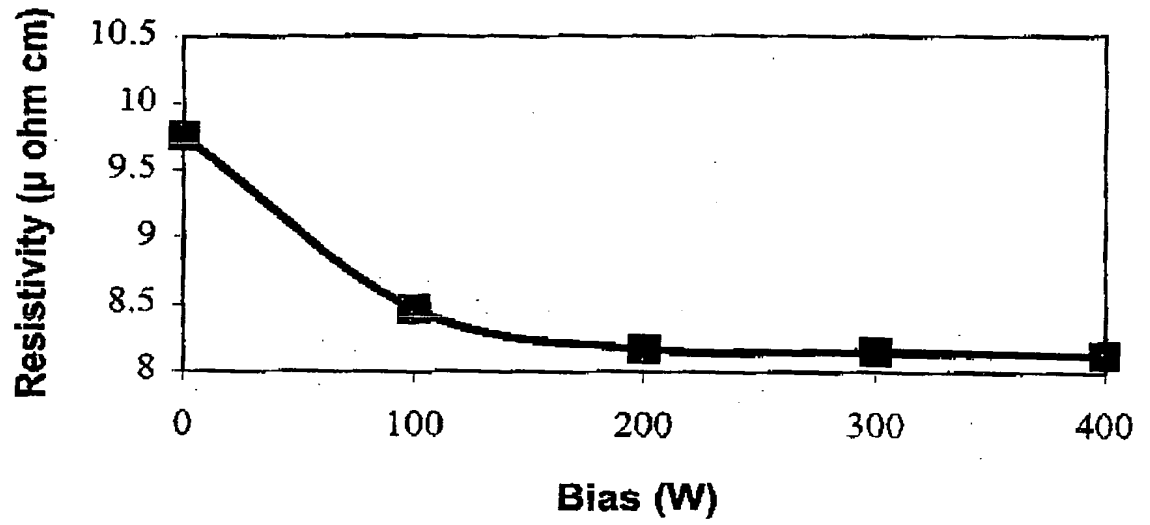


THIS PAGE BLANK (USPTO)

14

figure 6

330 mm diameter target

5

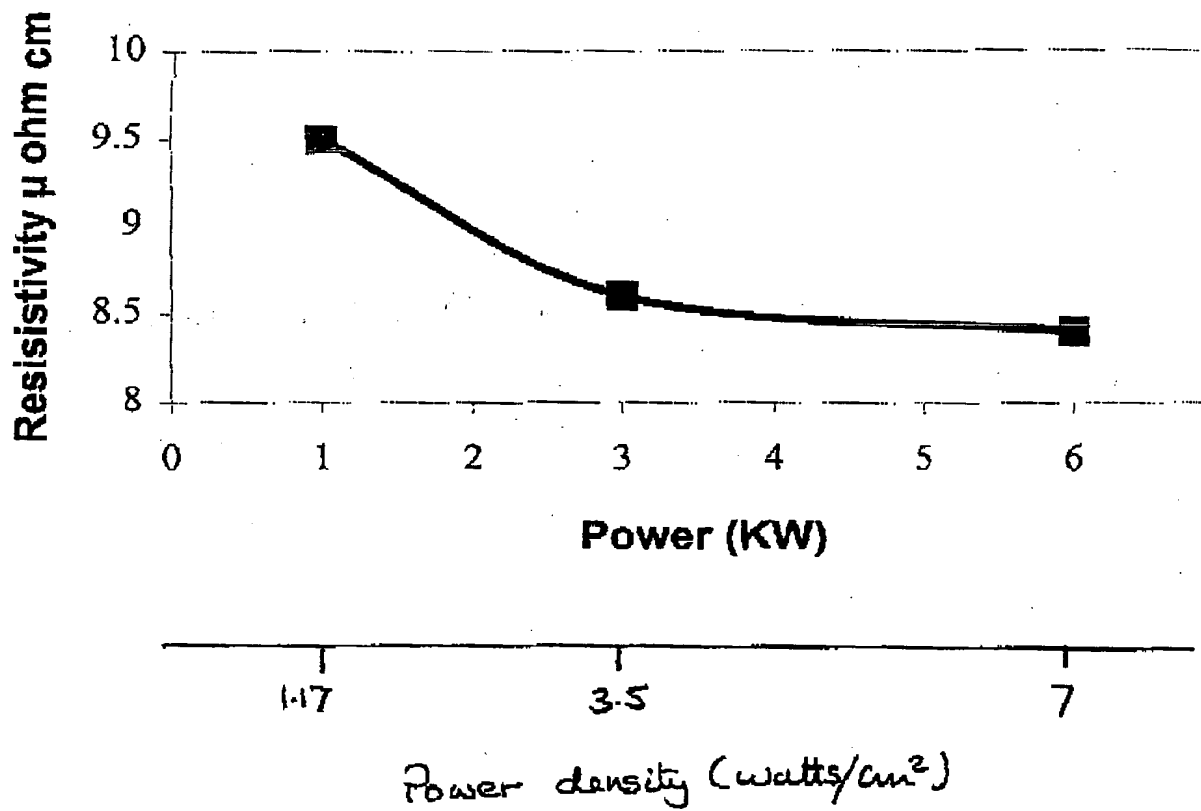

THIS PAGE BLANK (USPTO)

15

figure 7

Tungsten nitride	Ar sputter gas	Kr sputter gas
Deposition rate	28nm/kW min	45nm/kW min
Resistivity (micro ohm cm ⁻¹)	181	171
Film stress (dynes cm ⁻²)	1.2 E10C Compressive	1.9 E9T Tensile

5

10

15

THIS PAGE BLANK (USPTO)

16

figure 8

Gas	DC Voltage	DC Amps	Pressure mT
Ar	358	3.0	6.6
Kr	427	2.4	6.3

5

10

15

20

THIS PAGE BLANK (USPTO)

figure 9

Tungsten deposited

Gas	Pressure	Target Power	Platen Temp.	Film Stress	
35sccm Kr	2mT	6KW	400°C	4.3 E9	T
20sccm Kr mixed with 15sccm AR	1.9mT	6KW	400°C	3.1 E9	T
200sccm Ar	6mT	6KW	400°C	3.5 E9	C

- 5 T – Tensile
 C - Compressive

THIS PAGE BLANK (USPTO)